


Flex Pass Installation

1. Clean and dry the **inside** of your windshield with rubbing alcohol or windshield cleaner.
2. Position your pass on the inside front windshield just below the rearview mirror without obstructing the driver's view. Place it below any metalized sun strips or visor tints. If your windshield is metalized throughout, contact customer service at 1-866-936-8246.
3. Mount the plastic clip to the **inside** windshield using the enclosed sticker.

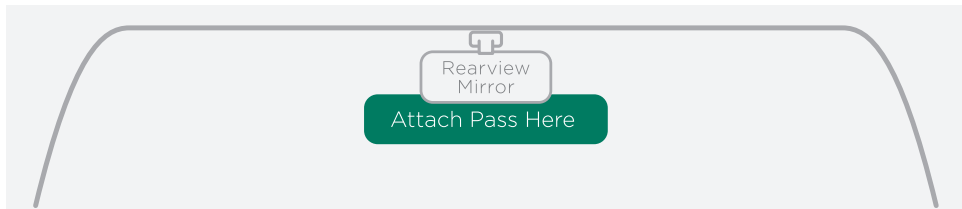

The Flex Pass is not designed to be moved between vehicles. If you need to move it, please contact us at 1-866-936-8246.